


IN-STOCK CATALOG

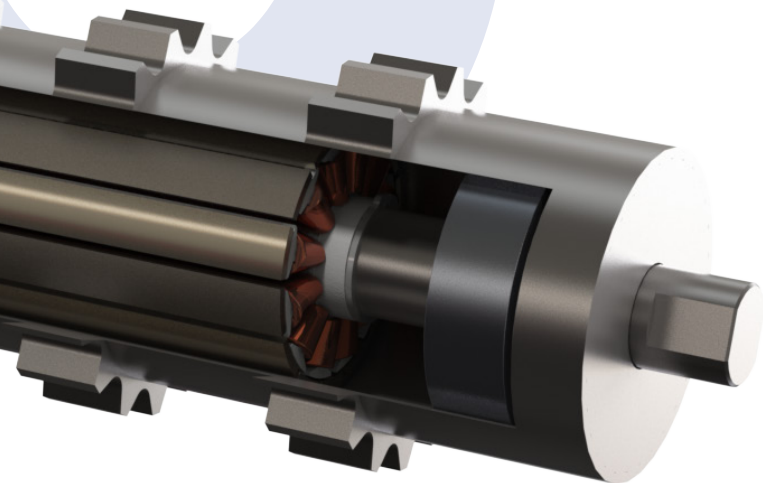

DESIGNED FOR SANITARY APPLICATIONS

Our designs feature a fully sealed outer shell, significantly reducing washdown time and locations that collect food debris.

LESS MOVING PARTS, EASY TO CLEAN.

BROWSE OUR ONLINE CATALOG

For the most up to date product specifications and availability scan the QR code.

ONE MOTION POWERED PULLEY





GLOSSARY

1. **58 Series Powered Pulley**
2. **81 Series Powered Pulley**
3. **120 Series Powered Pulley**
4. **135 Series Powered Pulley**
5. **165 Series Powered Pulley**
6. **215 Series Powered Pulley**
7. **Electrical Connectors**
8. **Mounting Dimensions**
9. **Discover More**

58 SERIES

POWERED PULLEY




*Max Current is 2x FLA

[A] Face Width	Nm	Belt Pull	FLA*	Max RPM @60hz
12" (305 mm)	5	73 N (17 lbs)	1.77 amps	514 RPM
14" (355 mm)	6	89 N (20 lbs)	2.0 amps	514 RPM
16" (405 mm)	6	89 N (20 lbs)	2.0 amps	514 RPM
18" (455 mm)	8	118 N (27 lbs)	3.91 amps	514 RPM
20" (510 mm)	8	118 N (27 lbs)	3.91 amps	514 RPM
22" (560 mm)	10	147 N (33 lbs)	3.73 amps	514 RPM
24" (610 mm)	10	47 N (33 lbs)	3.73 amps	514 RPM

Our Hygienic Mag-Drive product line is compatible with popular sanitary belt types.
Catalog Products can be delivered in 10 days or less.

81 SERIES

POWERED PULLEY

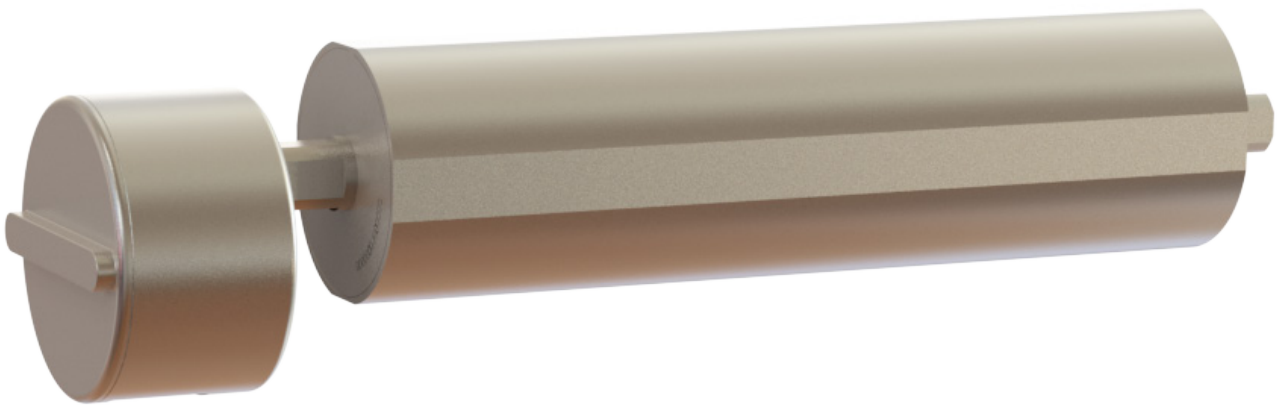


*Max Current is 2x FLA

[A] Face Width	Nm	Belt Pull	FLA*	Max RPM @60hz
12" (305 mm)	15	165 N (37 lbs)	2.7 amps	514 RPM
14" (355 mm)	15	165 N (37 lbs)	2.7 amps	514 RPM
16" (405 mm)	20	220 N (50 lbs)	2.34 amps	514 RPM
18" (455 mm)	25	276 N (62 lbs)	2.57 amps	514 RPM
20" (510 mm)	25	276 N (62 lbs)	2.57 amps	514 RPM
22" (560 mm)	30	329 N (74 lbs)	5.28 amps	514 RPM
24" (610 mm)	30	329 N (74 lbs)	5.28 amps	514 RPM

Our Hygienic Mag-Drive product line is compatible with popular sanitary belt types.
Catalog Products can be delivered in 10 days or less.

120 SERIES

POWERED PULLEY

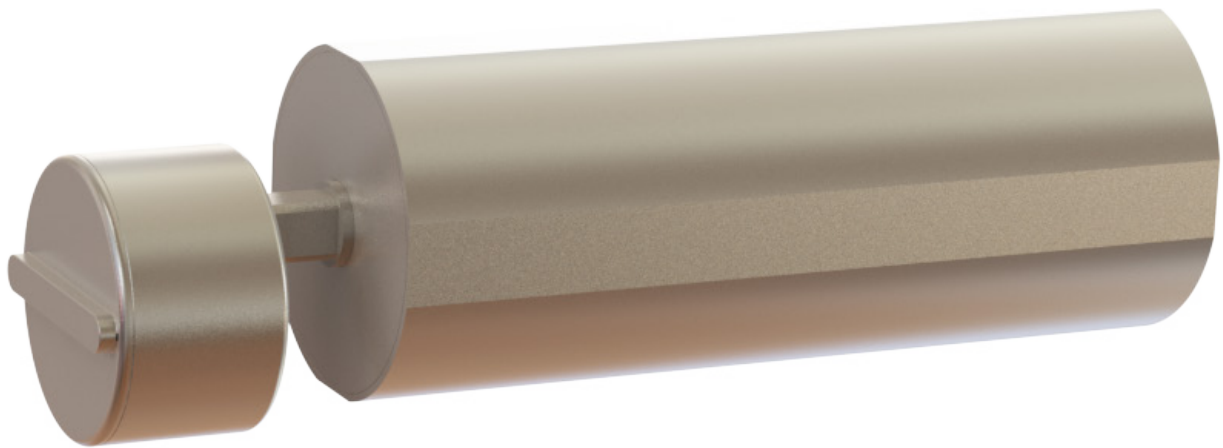


*Max Current is 2x FLA

[A] Face Width	Nm	Belt Pull	FLA*	Max RPM @60hz
12" (305 mm)	25	191 N (43 lbs)	2.75 amps	514 RPM
14" (355 mm)	30	231 N (52 lbs)	2.59 amps	514 RPM
16" (405 mm)	35	269 N (61 lbs)	2.27 amps	514 RPM
18" (455 mm)	40	307 N (69 lbs)	3.22 amps	514 RPM
20" (510 mm)	40	307 N (69 lbs)	3.22 amps	514 RPM
22" (560 mm)	40	307 N (69 lbs)	3.22 amps	514 RPM
24" (610 mm)	60	460 N (104 lbs)	5.03 amps	514 RPM

Our Hygienic Mag-Drive product line is compatible with popular sanitary belt types.
Catalog Products can be delivered in 10 days or less.

135 SERIES

POWERED PULLEY

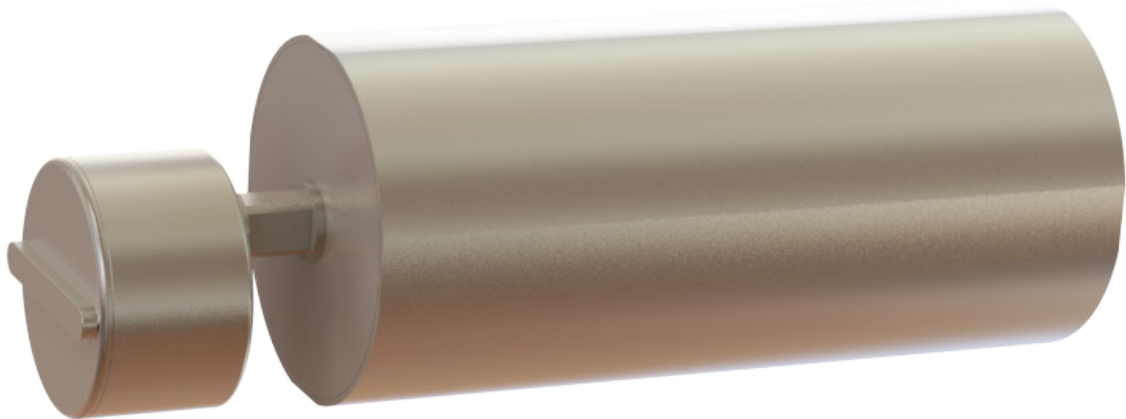


*Max Current is 2x FLA

[A] Face Width	Nm	Belt Pull	FLA*	Max RPM @60hz
12" (305 mm)	35	388 N (87 lbs)	3.01 amps	257 RPM
14" (355 mm)	60	662 N (149 lbs)	3.52 amps	257 RPM
16" (405 mm)	60	662 N (149 lbs)	3.52 amps	257 RPM
18" (455 mm)	80	883 N (198 lbs)	3.65 amps	257 RPM
20" (510 mm)	80	883 N (198 lbs)	3.65 amp	257 RPM
22" (560 mm)	80	883 N (198 lbs)	3.65 amp	257 RPM
24" (610 mm)	120	1324 N (298 lbs)	7.59 amps	257 RPM

Our Hygienic Mag-Drive product line is compatible with popular sanitary belt types.
Catalog Products can be delivered in 10 days or less.

165 SERIES

POWERED PULLEY

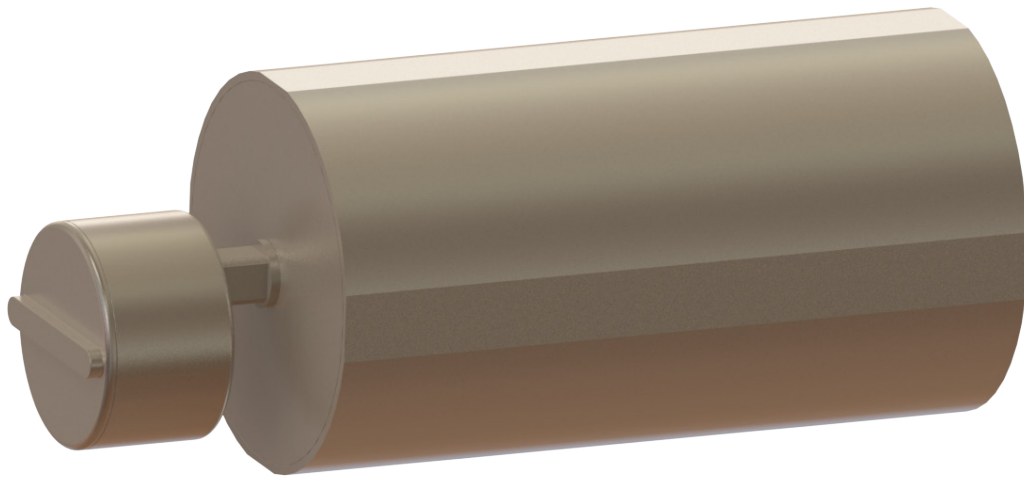


*Max Current is 2x FLA

[A] Face Width	Nm	Belt Pull	FLA*	Max RPM @60hz
12" (305 mm)	70	801 N (180 lbs)	4.94 amps	257 RPM
14" (355 mm)	80	916 N (206 lbs)	4.86 amps	257 RPM
16" (405 mm)	110	1259 N (283 lbs)	4.62 amps	257 RPM
18" (455 mm)	130	1486 N (334 lbs)	4.80 amps	257 RPM
20" (510 mm)	140	1601 N (360 lbs)	4.51 amps	257 RPM
22" (560 mm)	160	1828 N (411 lbs)	4.92 amps	257 RPM
24" (610 mm)	160	1828 N (411 lbs)	4.92 amps	257 RPM

Our Hygienic Mag-Drive product line is compatible with popular sanitary belt types.
Catalog Products can be delivered in 10 days or less.

215 SERIES

POWERED PULLEY

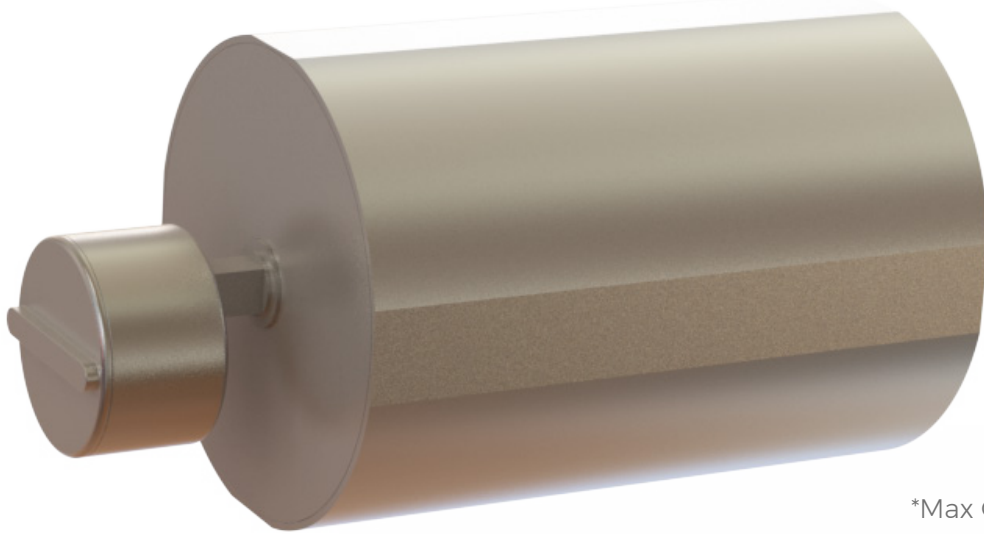


*Max Current is 2x FLA

[A] Face Width	Nm	Belt Pull	FLA*	Max RPM @60hz
12" (305 mm)	180	1601 N (360 lbs)	7.74 amps	180 RPM
18" (455 mm)	240	2135 N (480 lbs)	8.53 amps	180 RPM
24" (610 mm)	480	4266 N (959 lbs)	5.49 amps	180 RPM


Our Hygienic Mag-Drive product line is compatible with popular sanitary belt types.
Catalog Products can be delivered in 10 days or less.

ELECTRICAL CONNECTORS


POWERED PULLEY

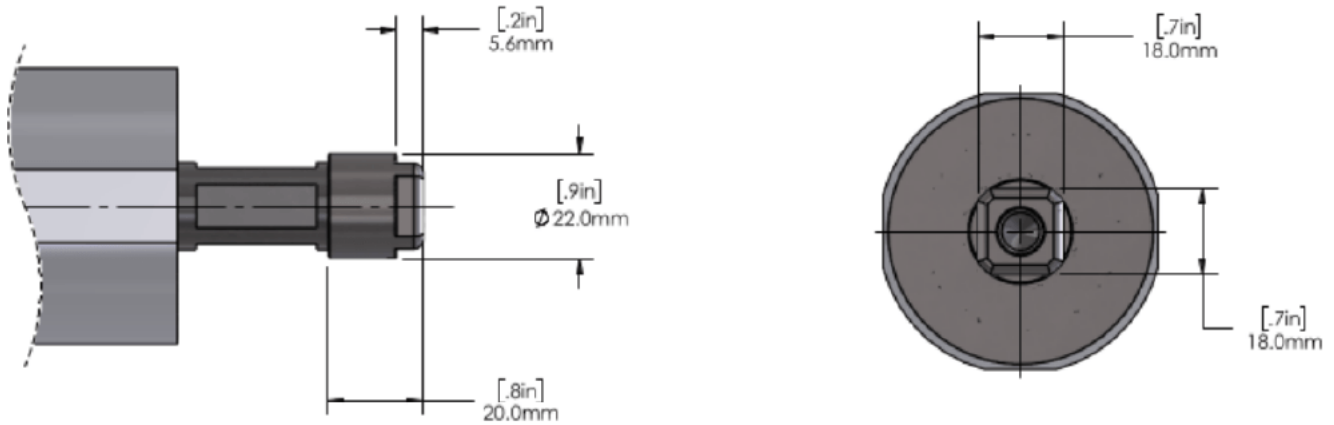

Flying Lead, Straight Connector

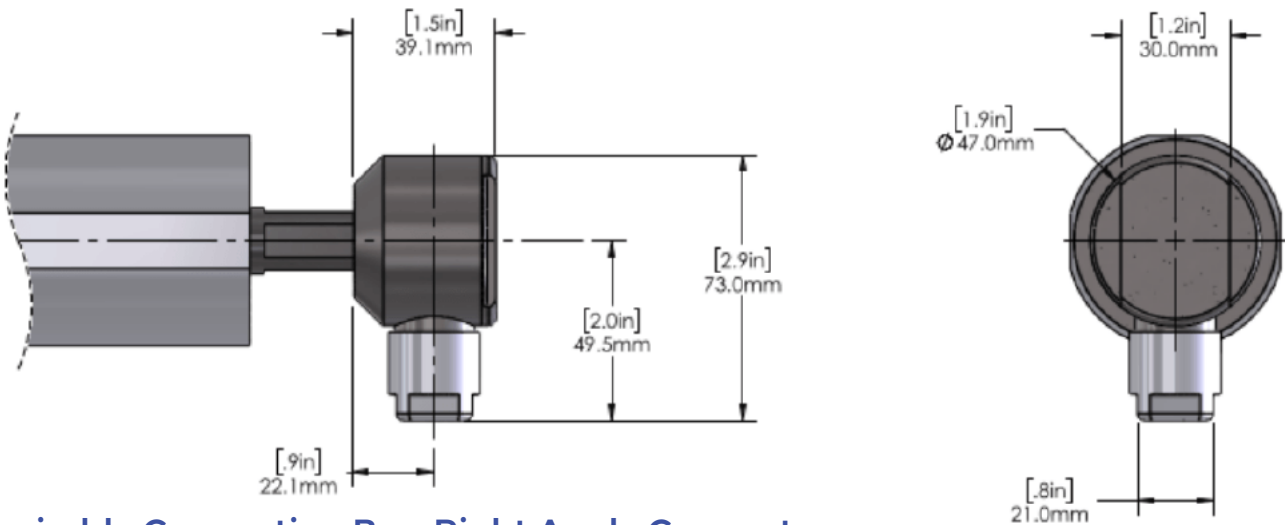


Repairable Connection Box, Right Angle Connector

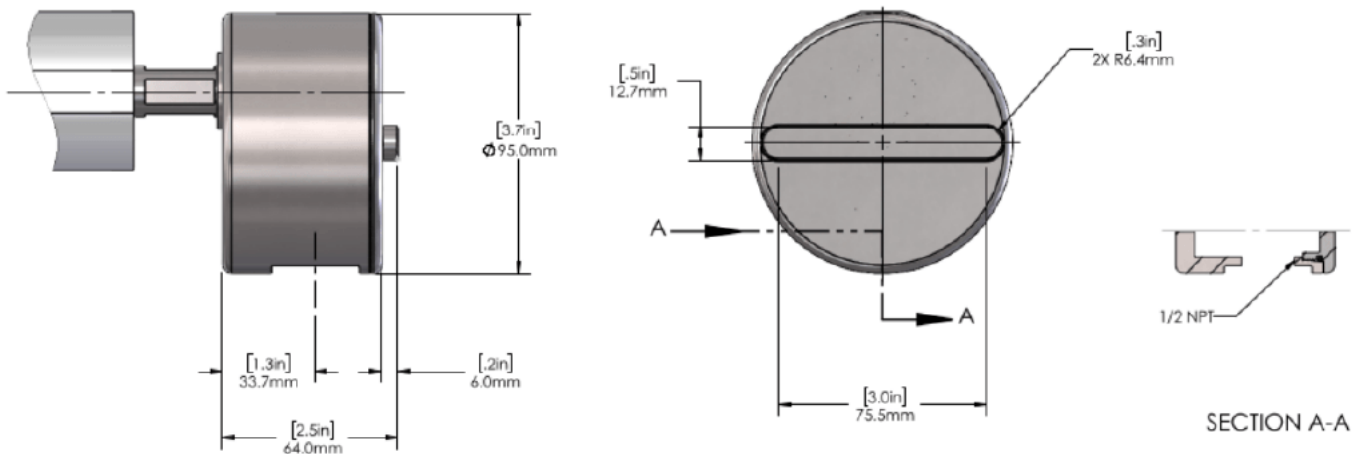

Junction Box Connector, IP69k

MOUNTING DIMENSIONS

POWERED PULLEY

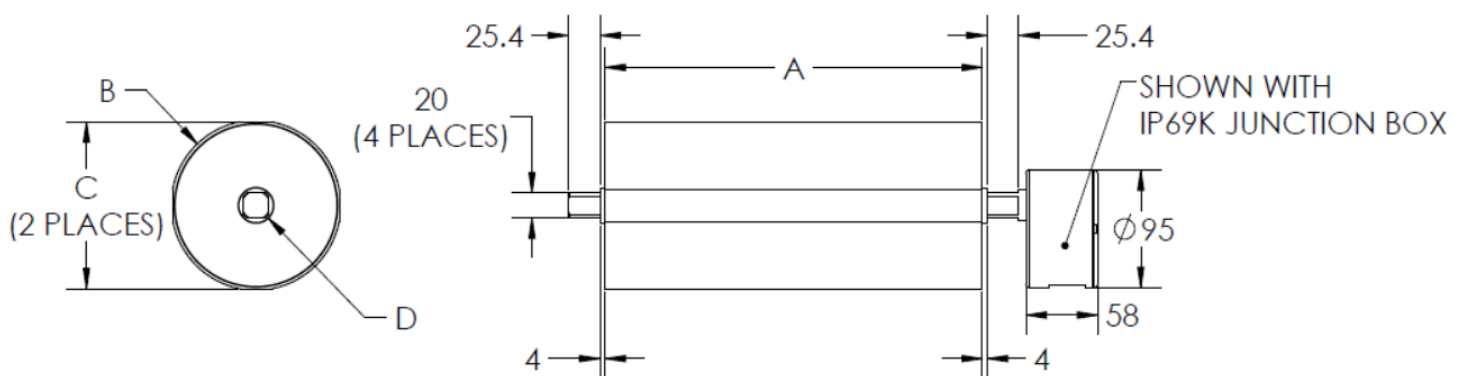

*MEASURED IN MM.

	A	B	C	D
58	See Series	60.0	58.0	18.5
81	See Series	83.0	80.7	23.5
120	See Series	118.5	115.0	29.0
135	See Series	137.0	134.5	29.0
215	See Series	215.0	211.0	28.5

*Dimensions are for reference only.

Contact om.support@actionpaQ.com to obtain a 3d model with more complete dimensions.

DISCOVER MORE

Scan any of the QR codes below to explore additional material:

Multi-Drive™



Powered Pulley



Powered Hub



Powered Shaft



**Build-A
Mag-Drive**



**Direct-Drive
Introduction**




**Product
Literature**



**Support
Documentation**



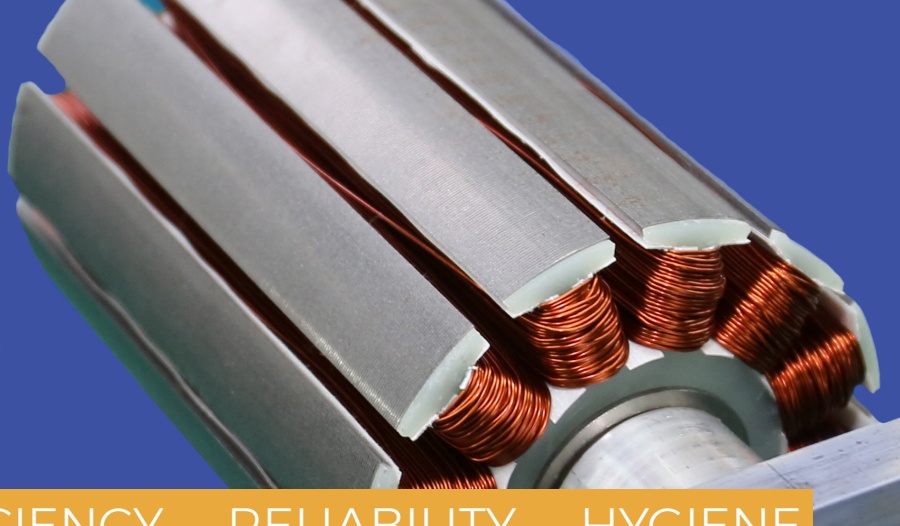

PERFORMANCE — EFFICIENCY — RELIABILITY — HYGIENE

The BAM (Build a Mag-Drive) program allows our OEM partners to receive a customized pulley in a few as 10 business days. The Mag-Drives are stocked and built in the USA in our Rogers, Arkansas facility.

With over 100+ design variations, BAM pulleys are compatible with numerous belt types. As always, OneMotion products carry an industry leading 3-year warranty, are food safe, and energy efficient.



LEARN MORE ABOUT **BUILD-A-MAG-DRIVE**

